



SERVICE BULLETIN

Classification: WT09-001b	Reference: NTB09-024b	Date: December 15, 2009
------------------------------	--------------------------	----------------------------

2009 - 2010 370Z / 2009 350Z ACCESSORY WHEEL LOCKS

This bulletin has been amended. The Applied Vehicles have been updated.
Please discard previous versions of this bulletin.

APPLIED VEHICLES: 2009 370Z (Z34) Coupe
2010 370Z (Z34) Coupe and Roadster
2009 350Z (Z33) Roadster

SERVICE INFORMATION

The accessory Wheel Lock Nuts for 370Z are different than those for 350Z.


When installing Wheel Lock Nuts, make sure to use the correct Part Number as listed below.

2009 370Z Coupe / 2010 370Z Coupe and Roadster

DESCRIPTION	MODEL	PART NUMBER
Wheel Locks (4-pc set) (With Flat Washer Style)	370Z Coupe	999W2-JT000

2009 350Z Roadster (convertible)

DESCRIPTION	MODEL	PART NUMBER
Wheel Locks (4-pc set) (Without Flat Washer Style)	350Z Roadster Grand Touring	999H1-A7009
	350Z Roadster non-Grand Touring	999H1-A7003

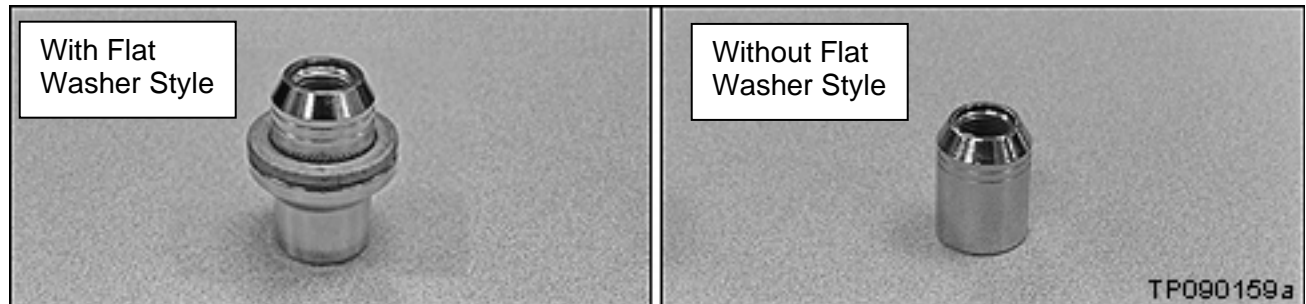

NOTE: See page 2 for additional information.

Nissan Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. NOTE: If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Nissan dealer to determine if this applies to your vehicle.

CLAIMS INFORMATION

Accessory wheel lock nuts and/or vehicle wheels that are damaged due to installation of the wrong nuts will not be considered a manufacturer defect and will not be covered under warranty.

Accessory Wheel Lock Installation / Removal Guidelines

- **Always use hand tools** when installing or removing accessory wheel lock nuts.
- **WARNING: Do not use power tools** to install or remove accessory wheel lock nuts.
- For ease of removal, the wheel lock nut should always be the first lug nut removed.
- If needed, clean threads on lug studs with a wire brush.
- The wheel lock nut should always be the last lug nut tightened.
- Always use the special key supplied in the wheel lock set to install and remove the wheel locks.
- Always tighten the wheel lock nuts – using a hand torque wrench – to the torque specification in the Service Manual.